




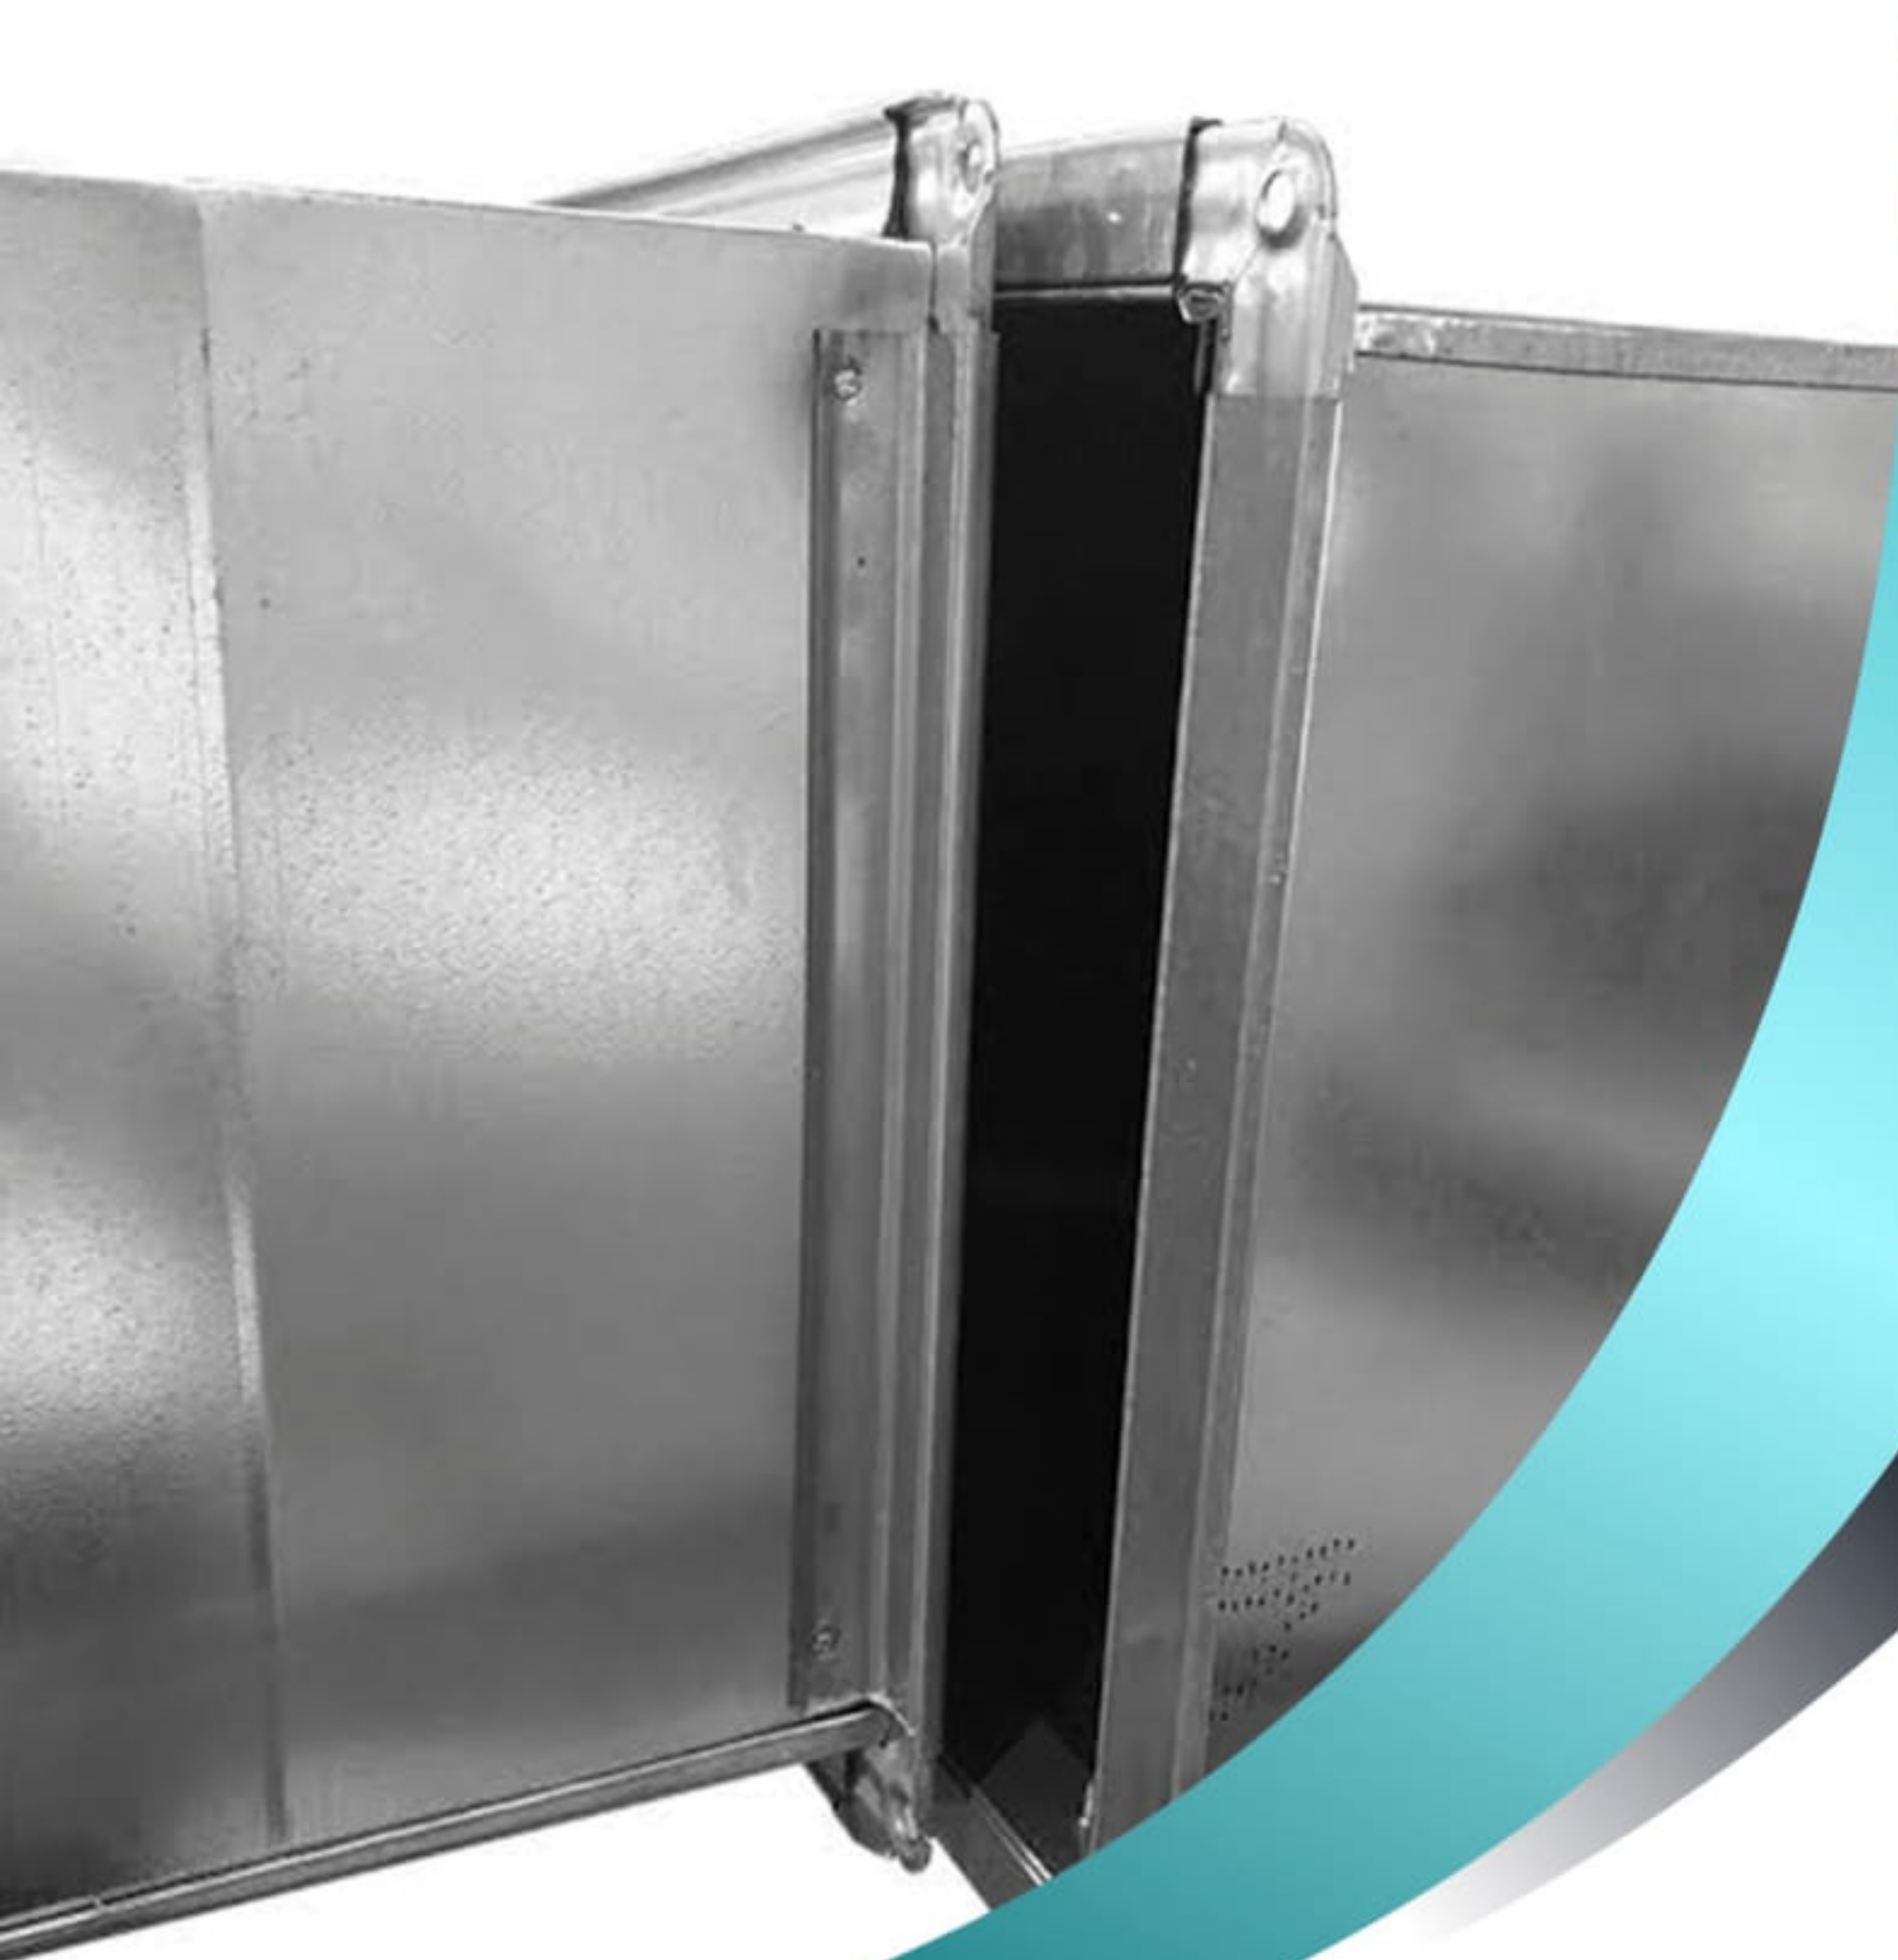

DUCT ACCESSORIES

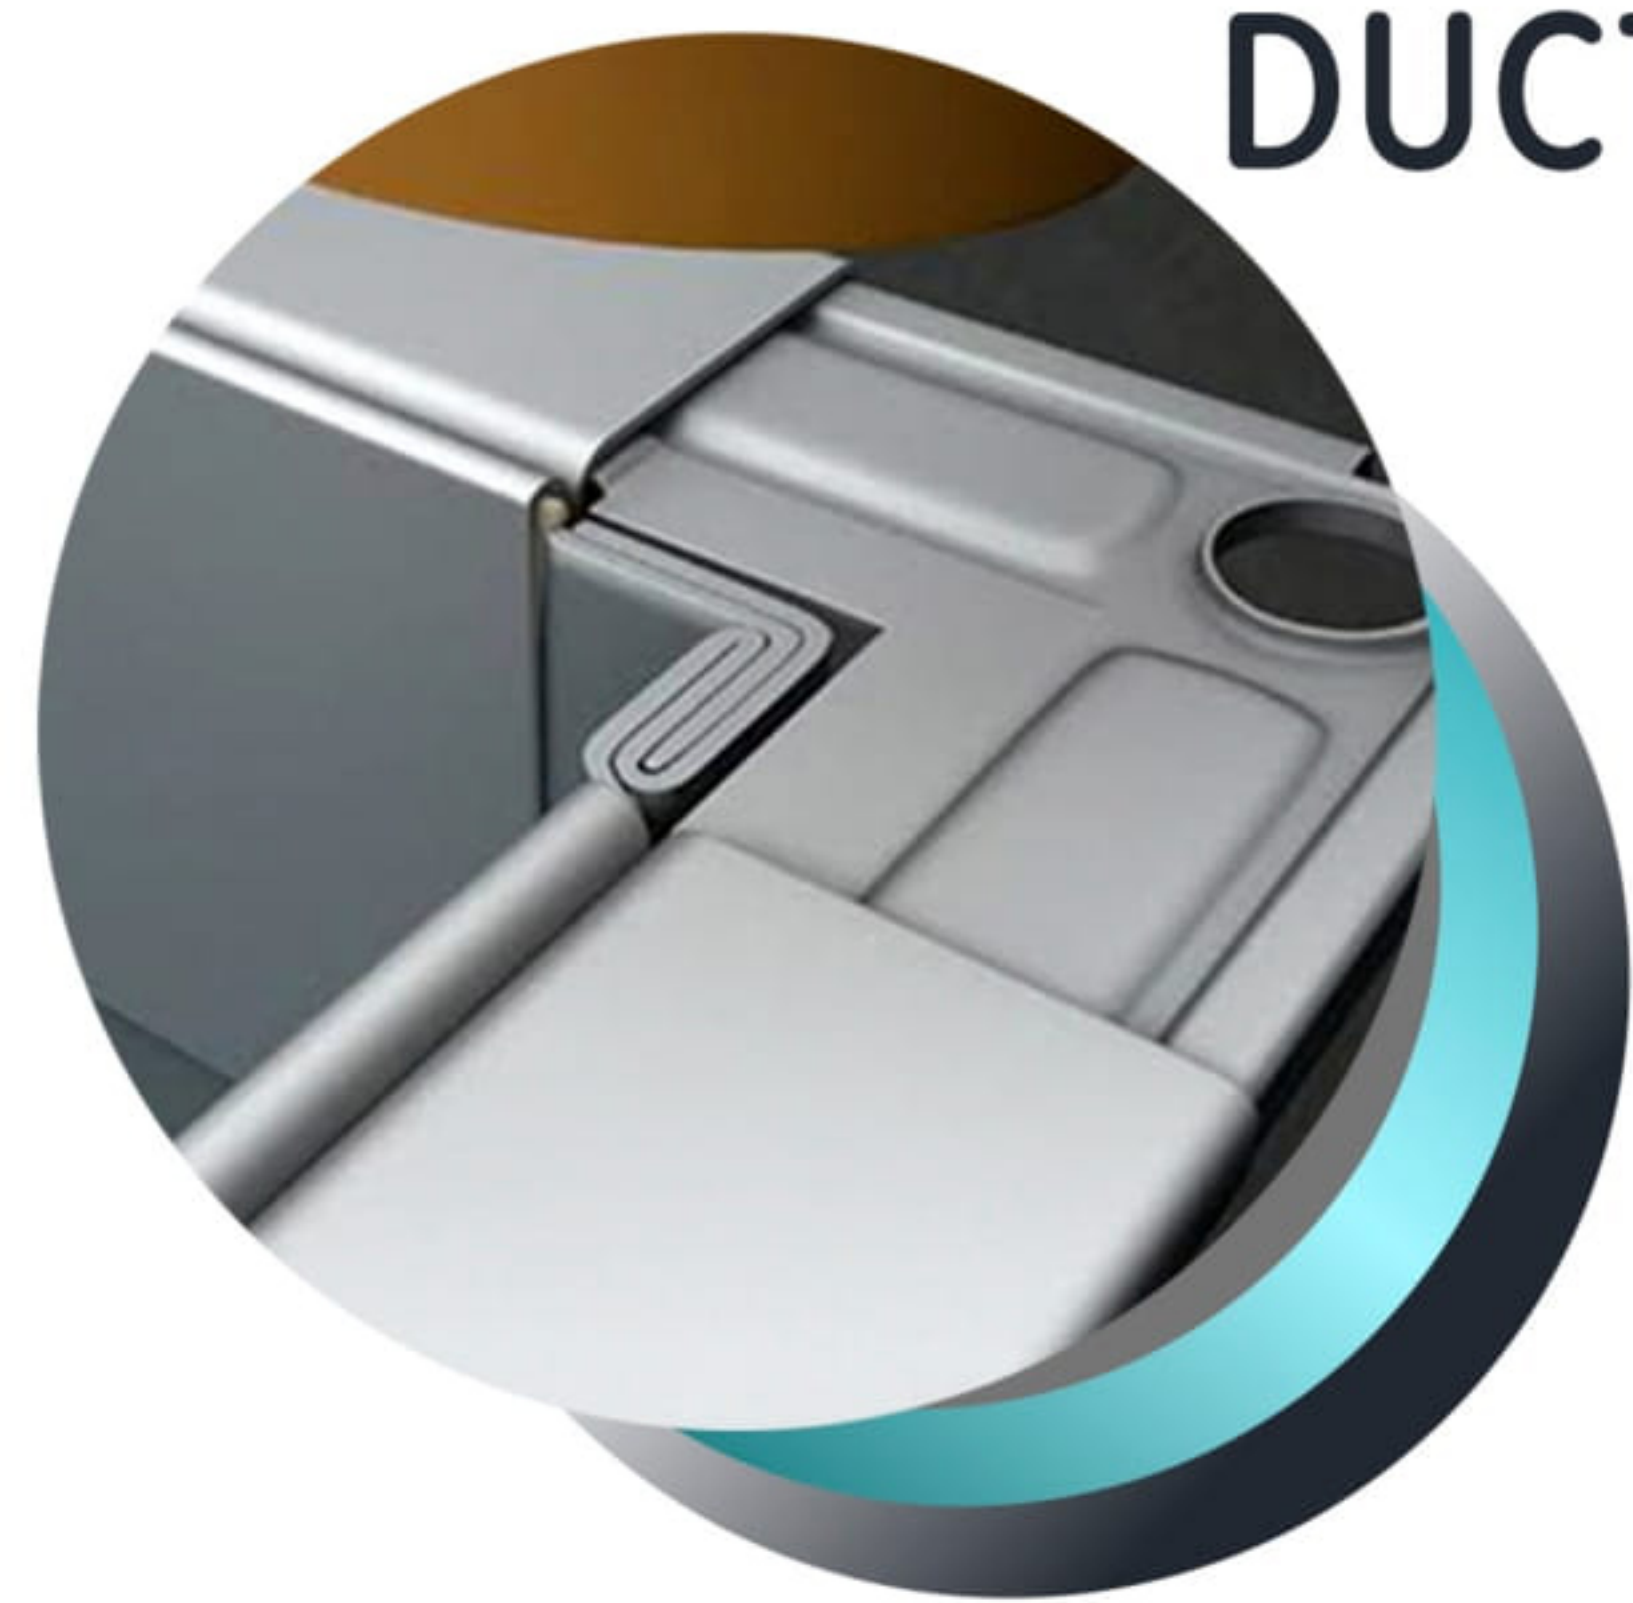

Types of connection (C & S)

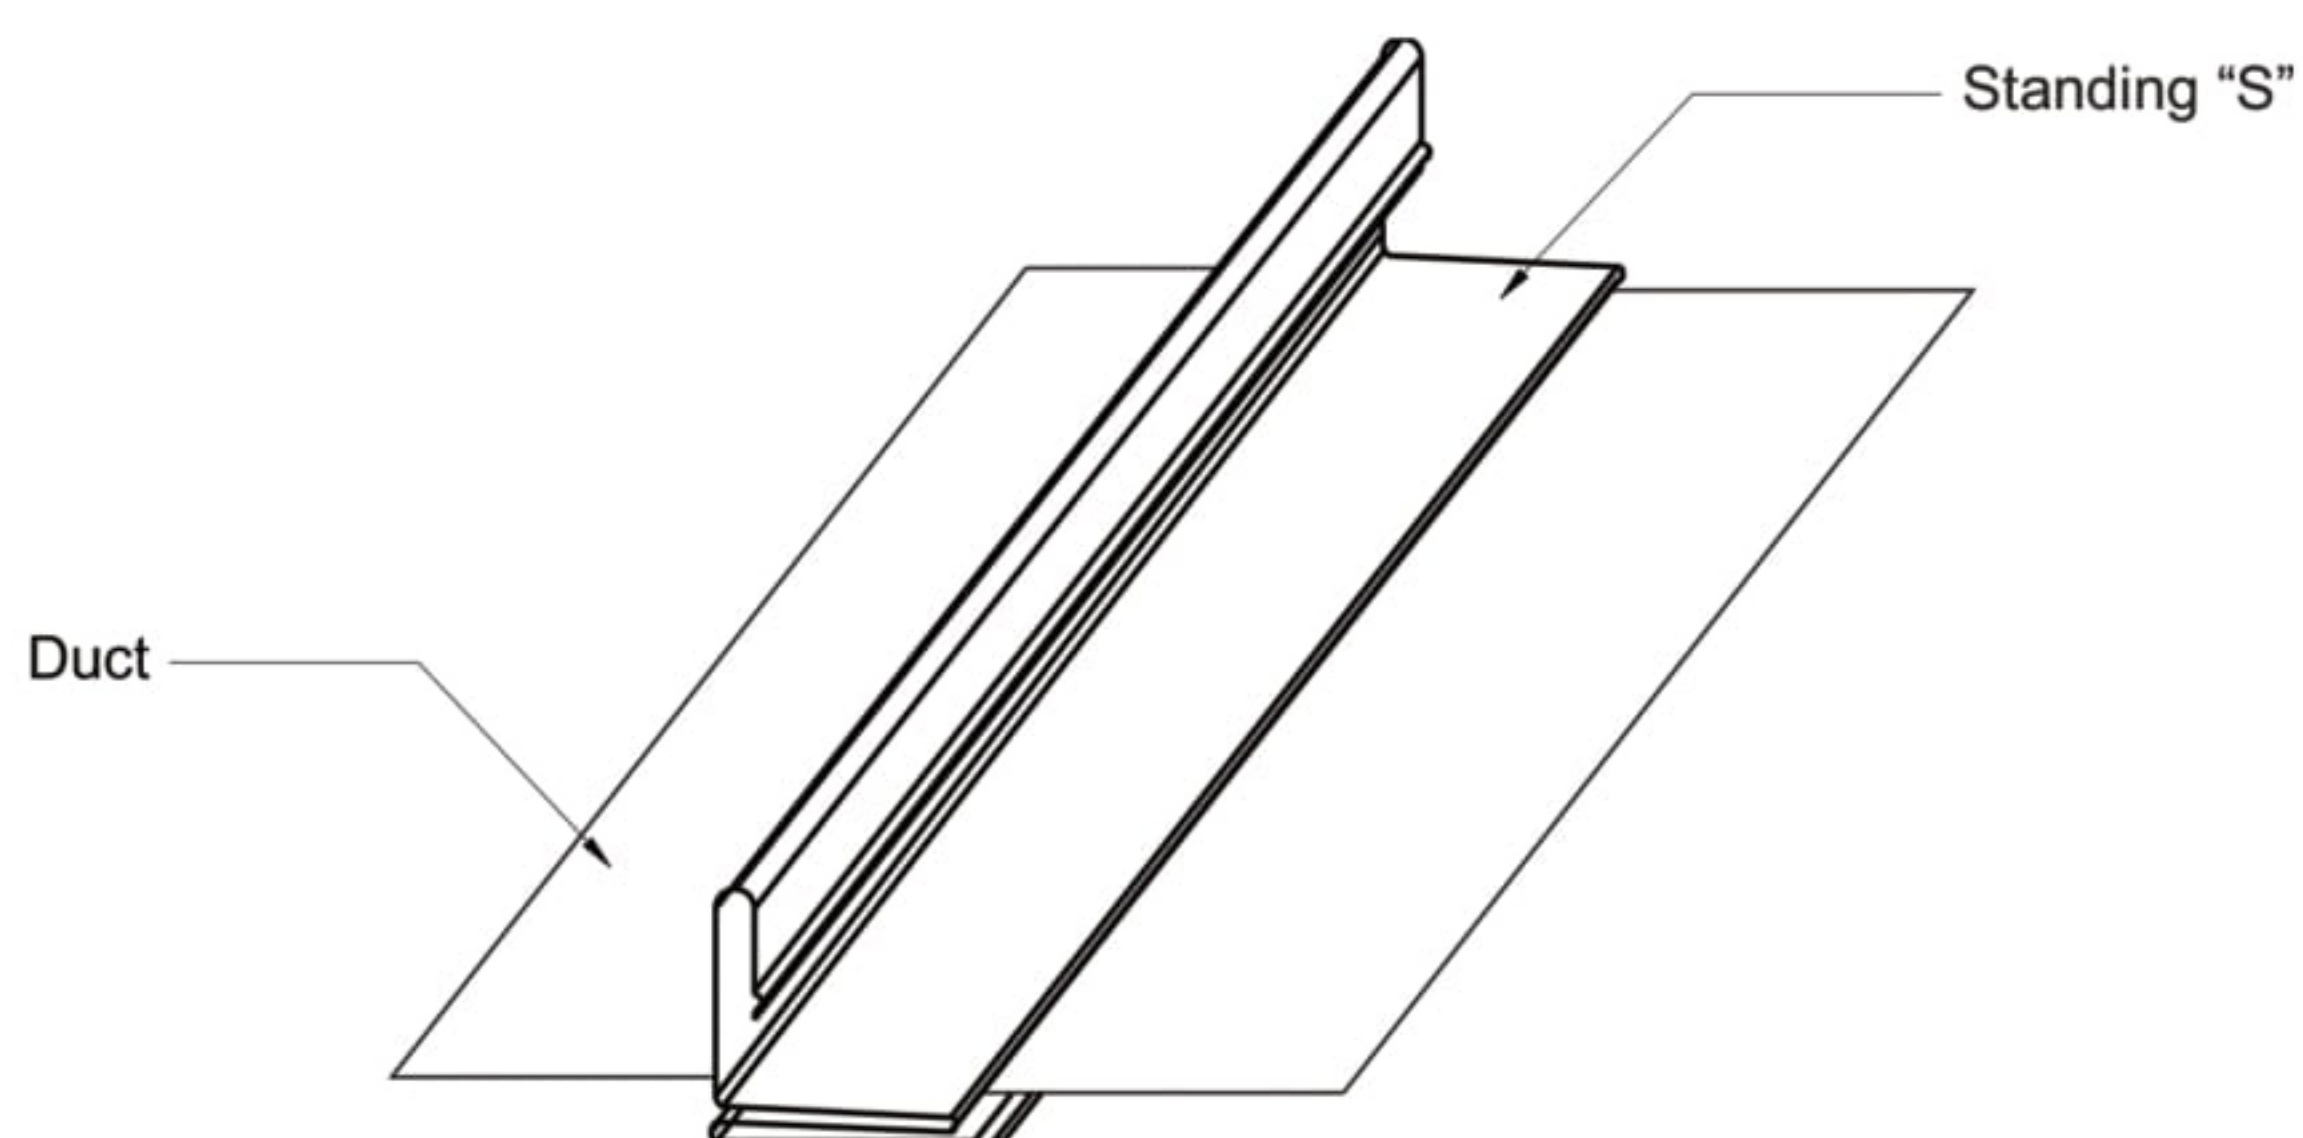


Slip "S"




Thickness 0.6mm

Standing "S"

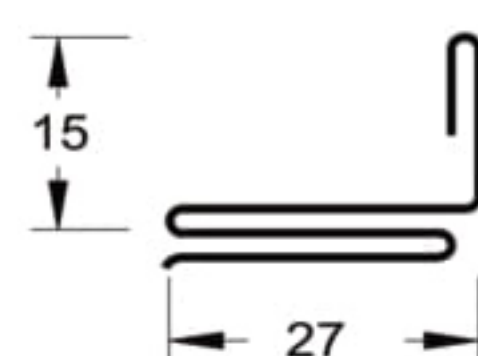

Thickness 0.6mm





Drive slip "C"
Standard





Thickness 0.6 to 1.0mm



Types of connection (TDC)

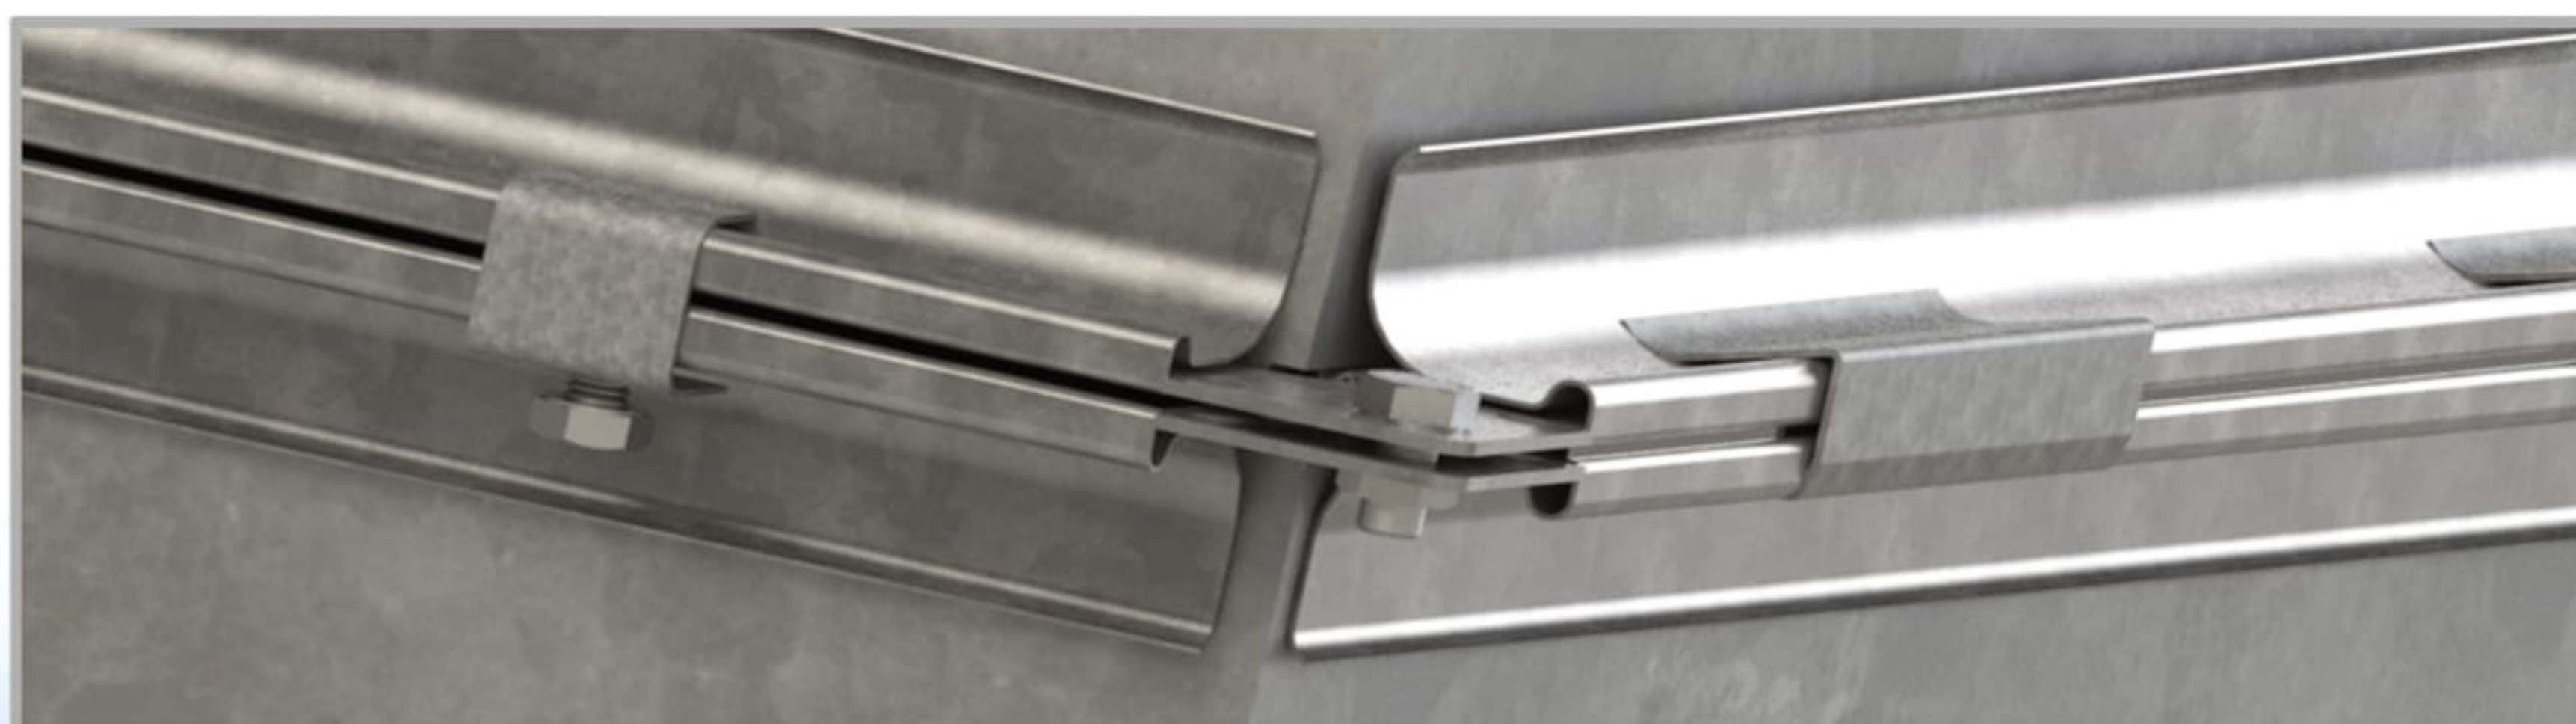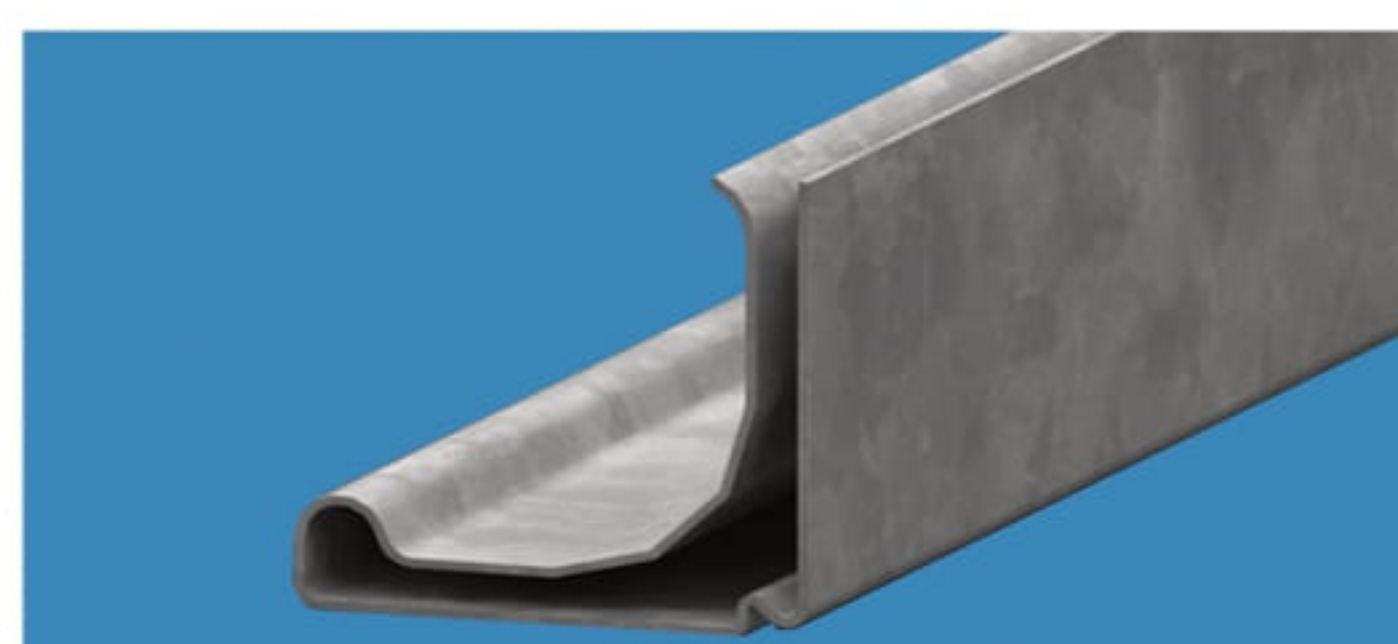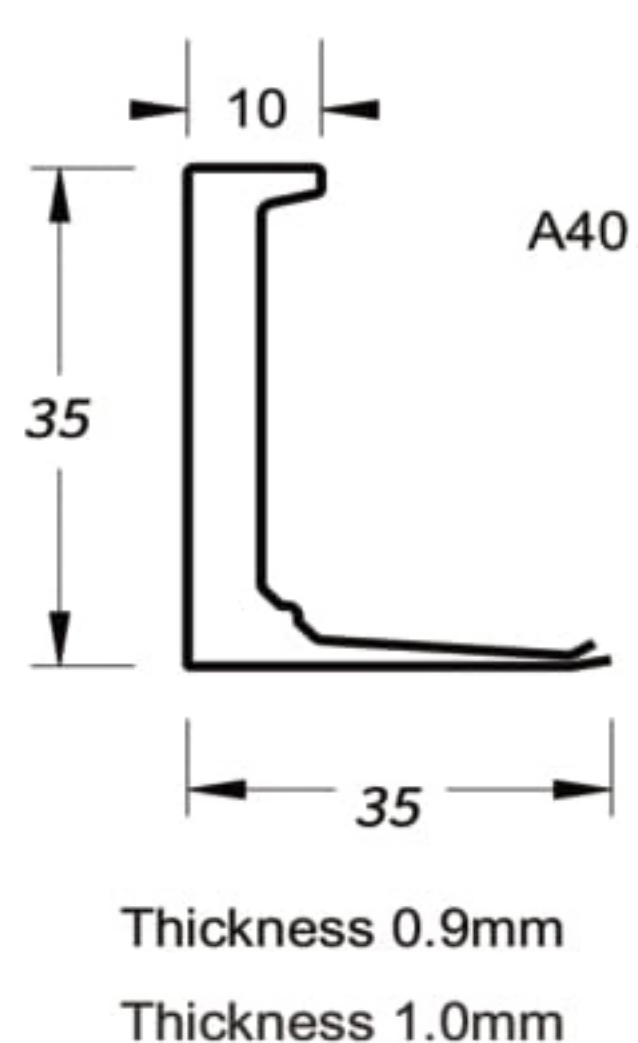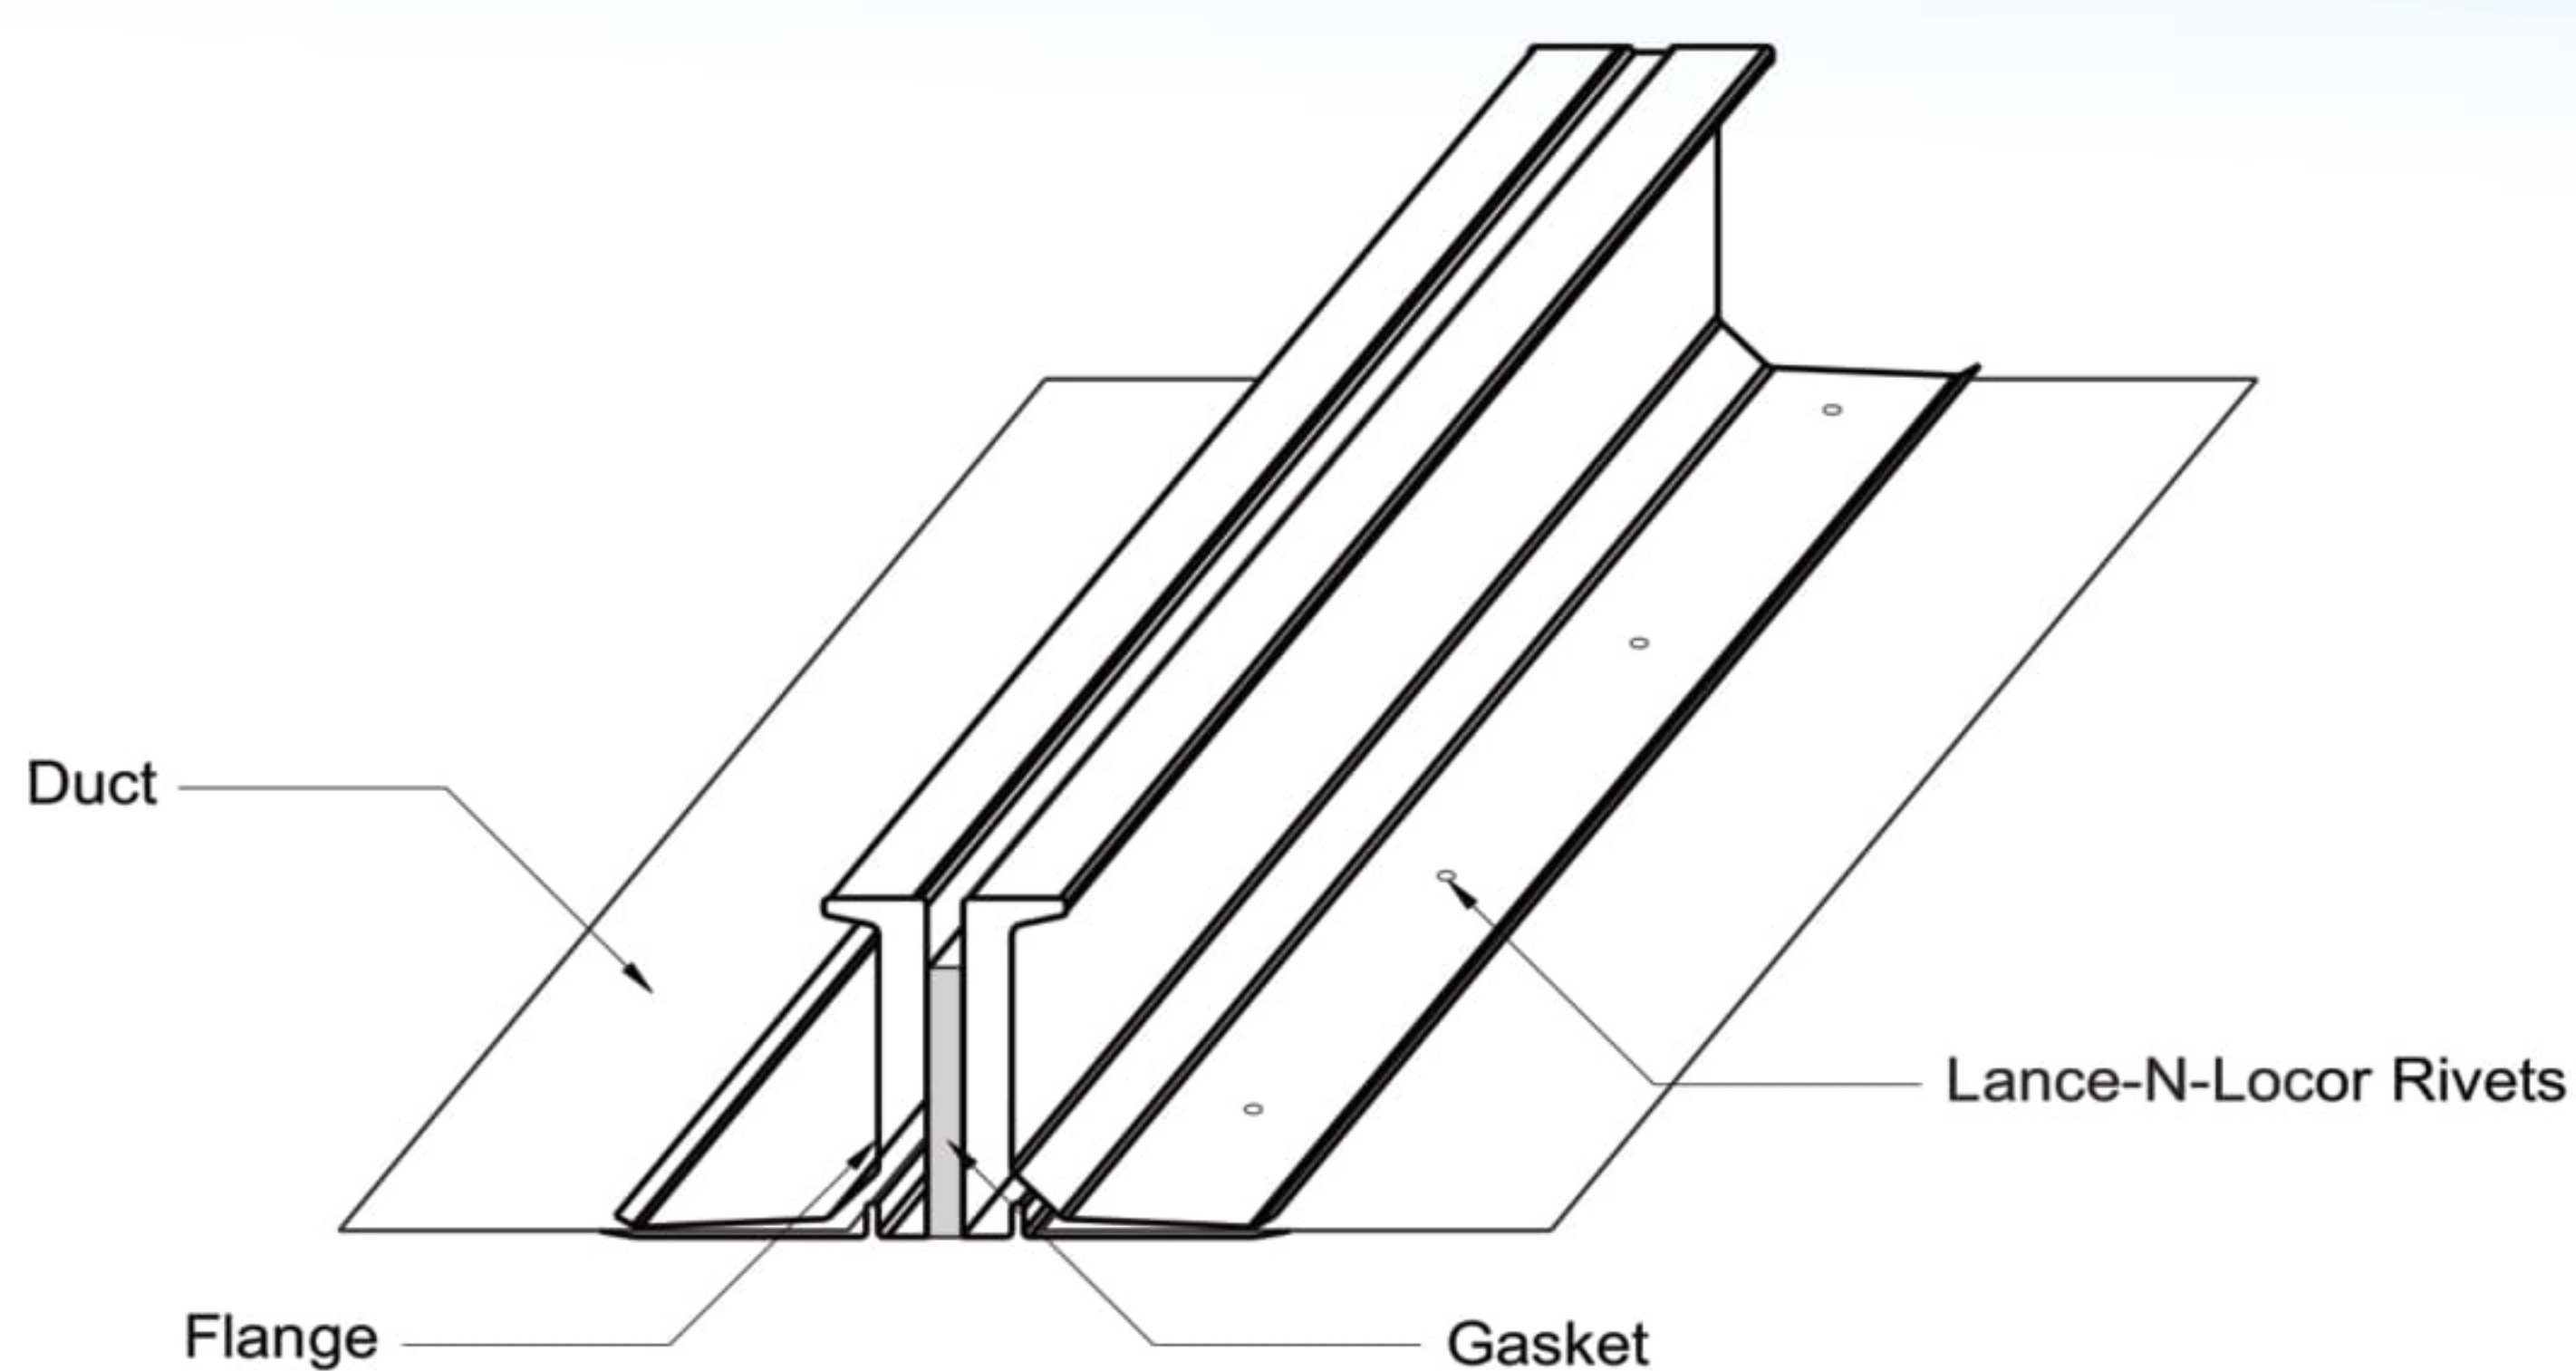

Types of connection (TDF)

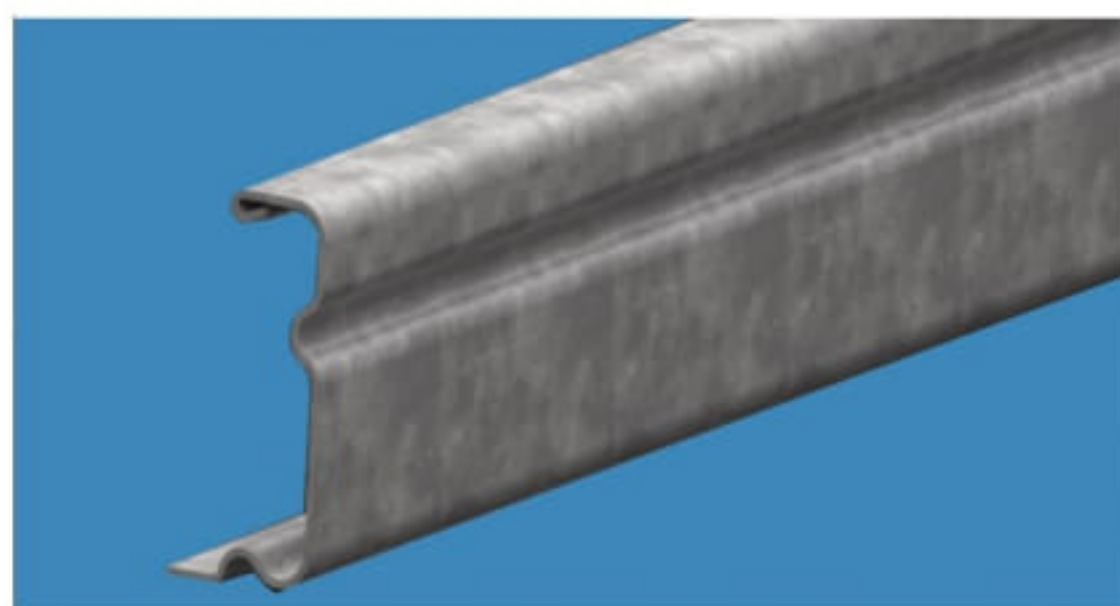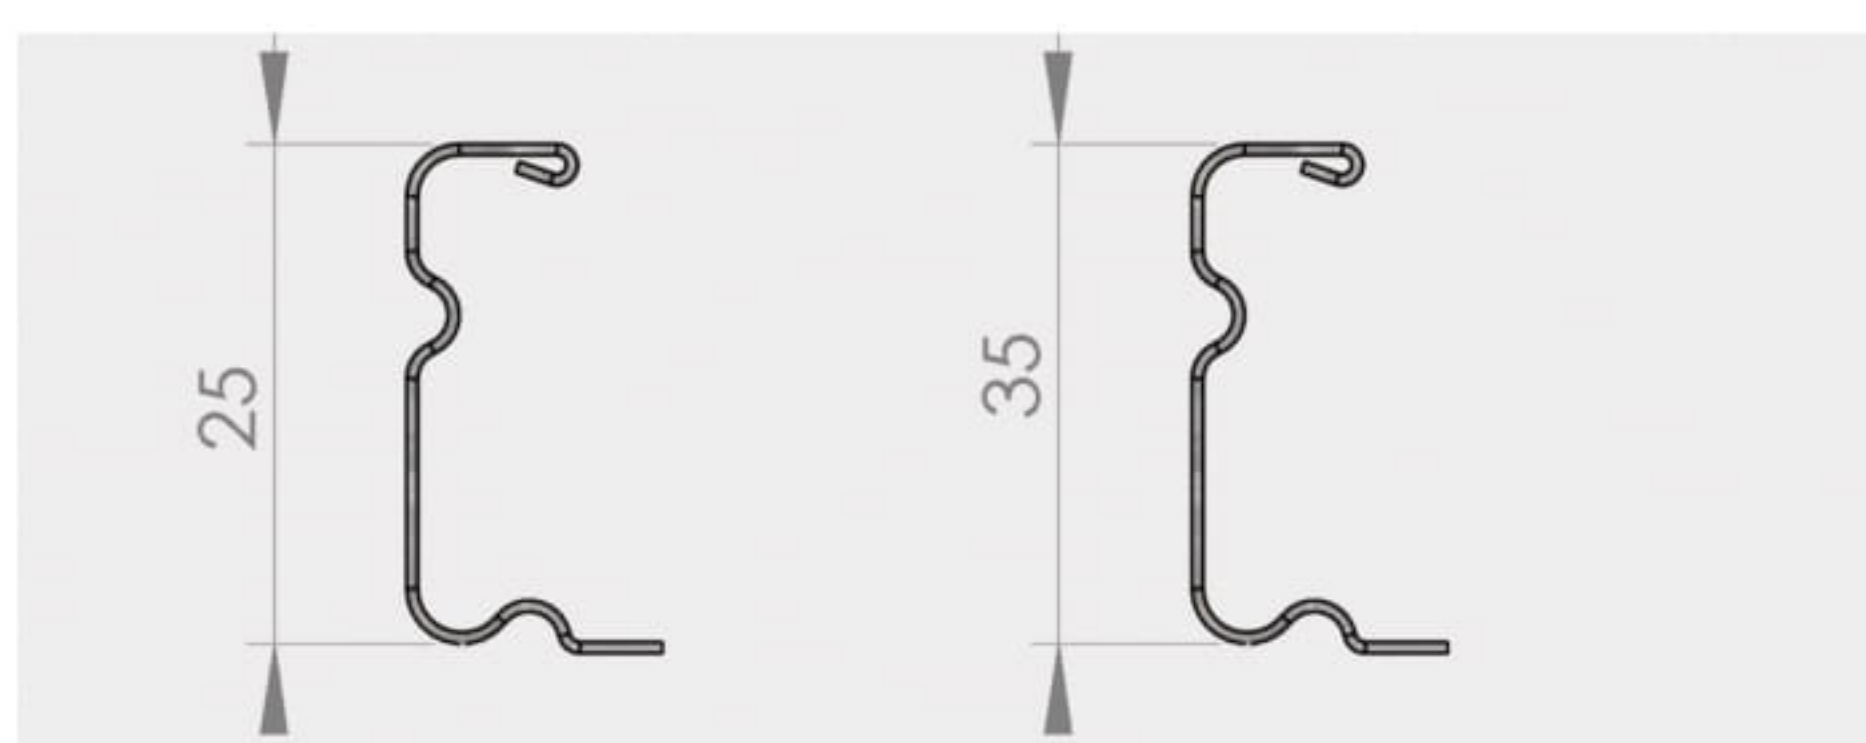


Duct accessories



Drive Slip






Flange System 20

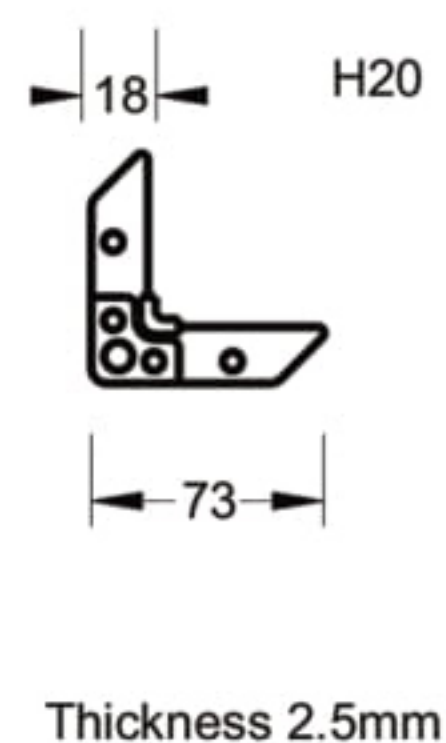

Flange System 40

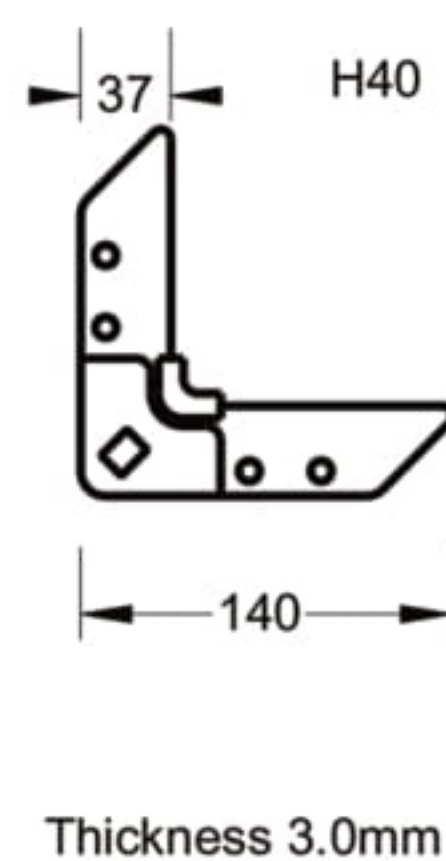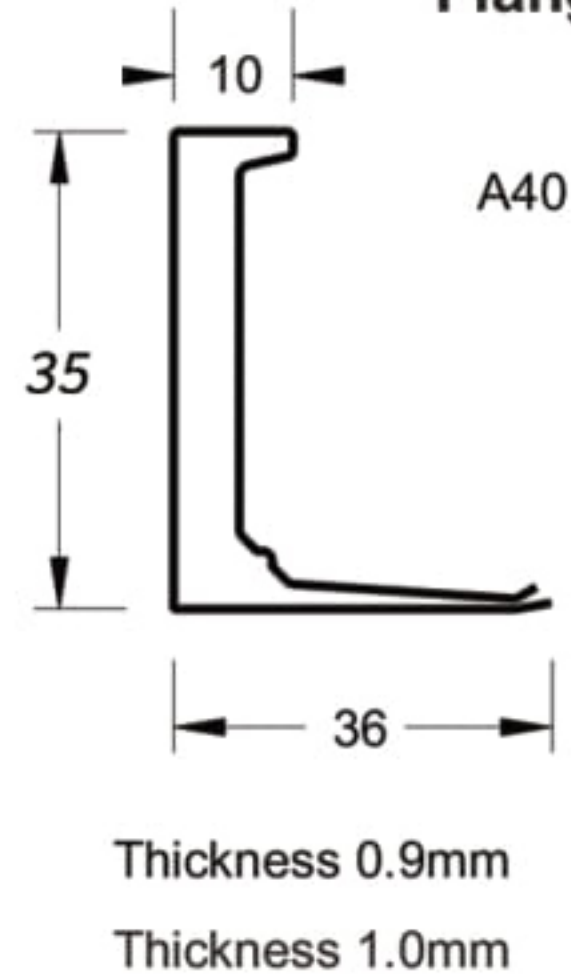

Flange System 30

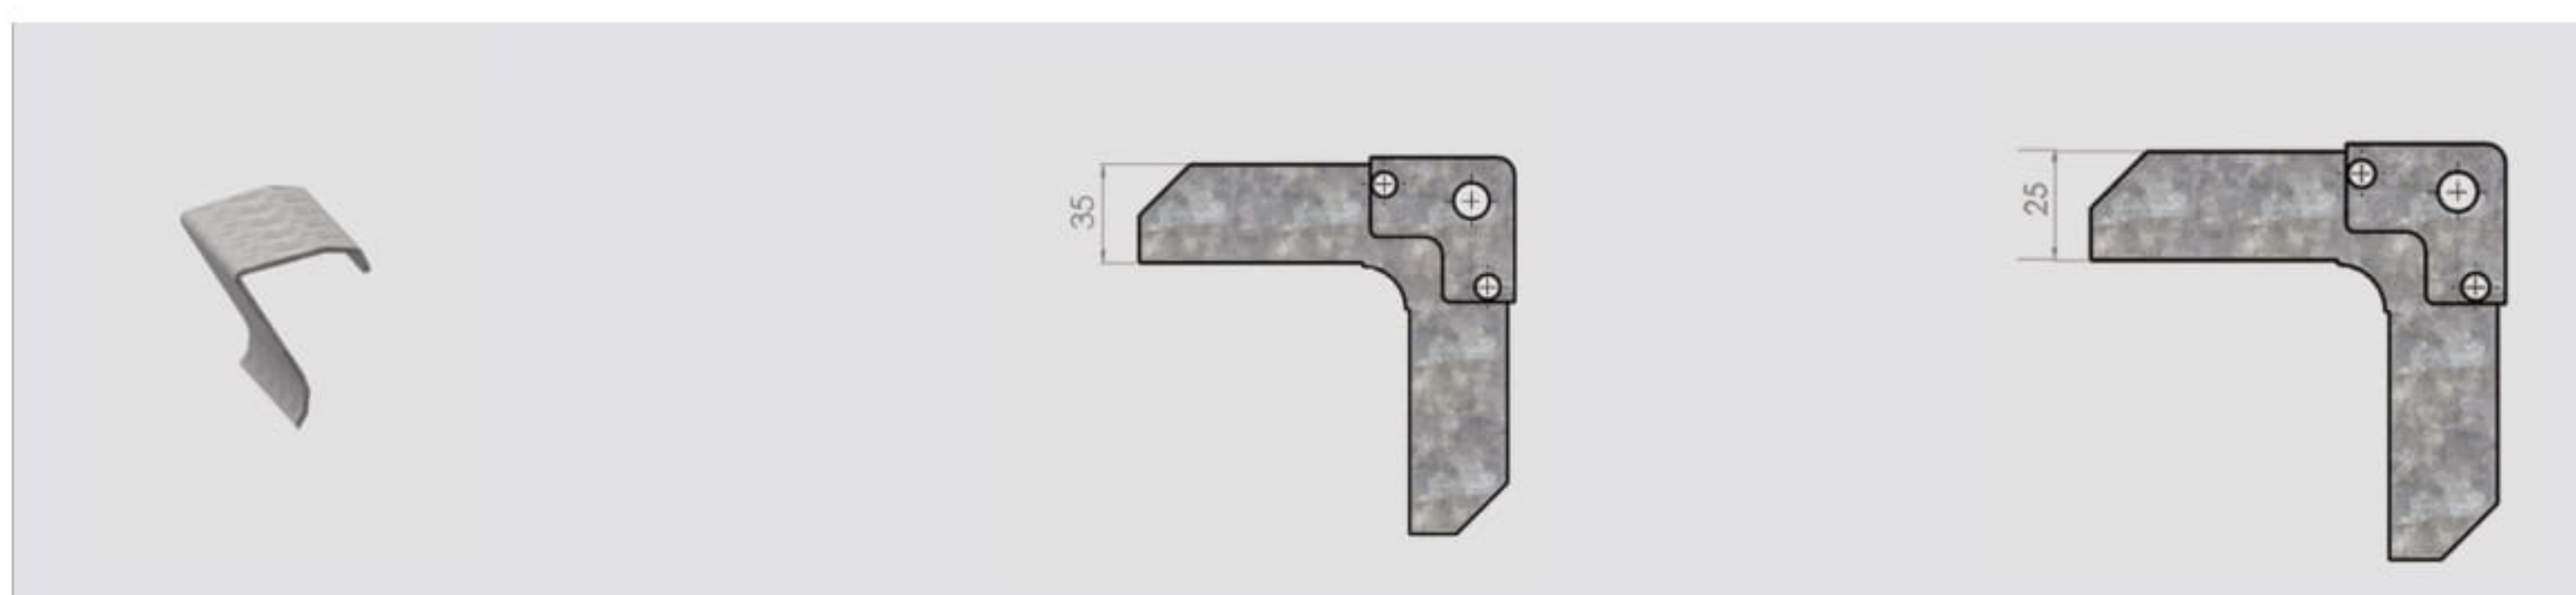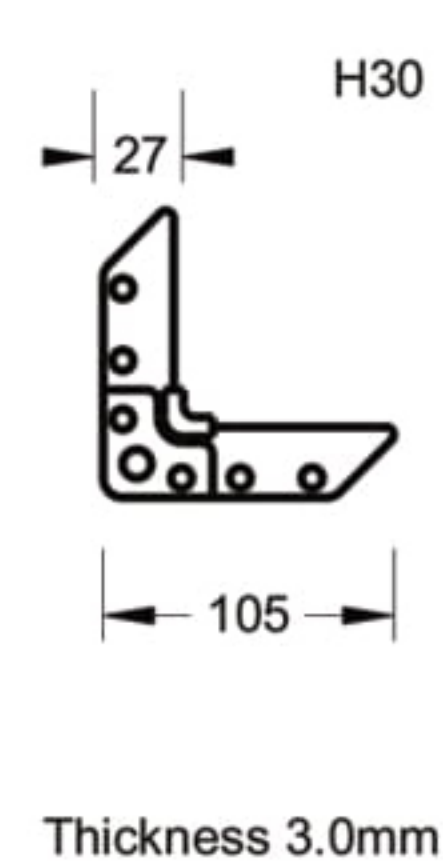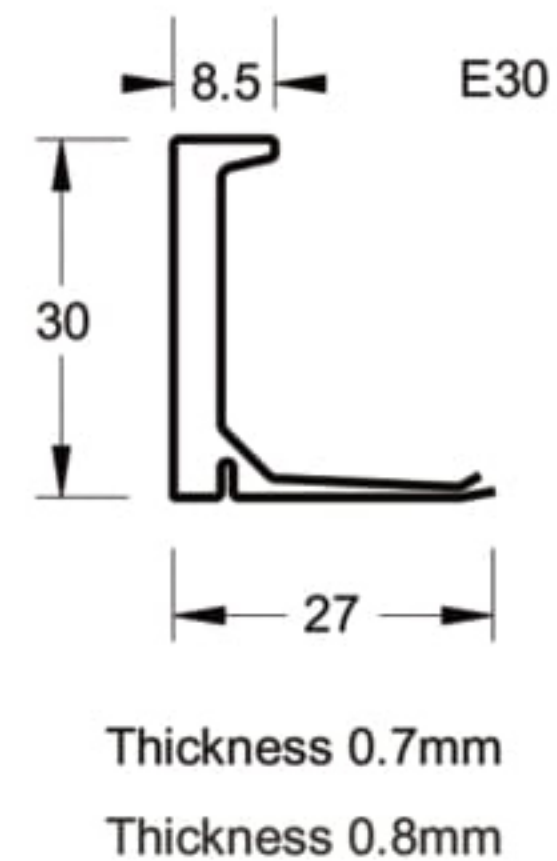

Reference for type of connection

MAX. WIDTH	Connector	DUCT LENGTHS	
		48	36"
		Gauge	
10" - DOWN	S&C	G-24	G-24
11 - 12"	S&C	G-24	G-24
13 - 14"	S&C	G-24	G-24
15 - 16"	S&C	G-24	G-24
17 - 18"	TDF	G-24	G-24
19 - 20"	TDF	G-24	G-24
21 - 22"	TDF	G-24	G-24
23 - 24"	TDF	G-24	G-24
25 - 26"	TDF	G-24	G-24
27 - 28"	TDF	G-22	G-24
29 - 30"	TDF	G-22	G-22
31 - 36"	TDF	G-22	G-22
37 - 40"	TDF	G-22	G-22
41 - 46"	TDF	G-22	G-22
47 - 54"	TDC	G-20	G-20
55 - 60"	TDC	G-20	G-20
61 - 72"	TDC	G-18	G-18
73 - UP	TDC	G-18	G-18

